




FLATPLATE

LOW PROFILE SCREWED FINISHES



www.bgelectrical.uk

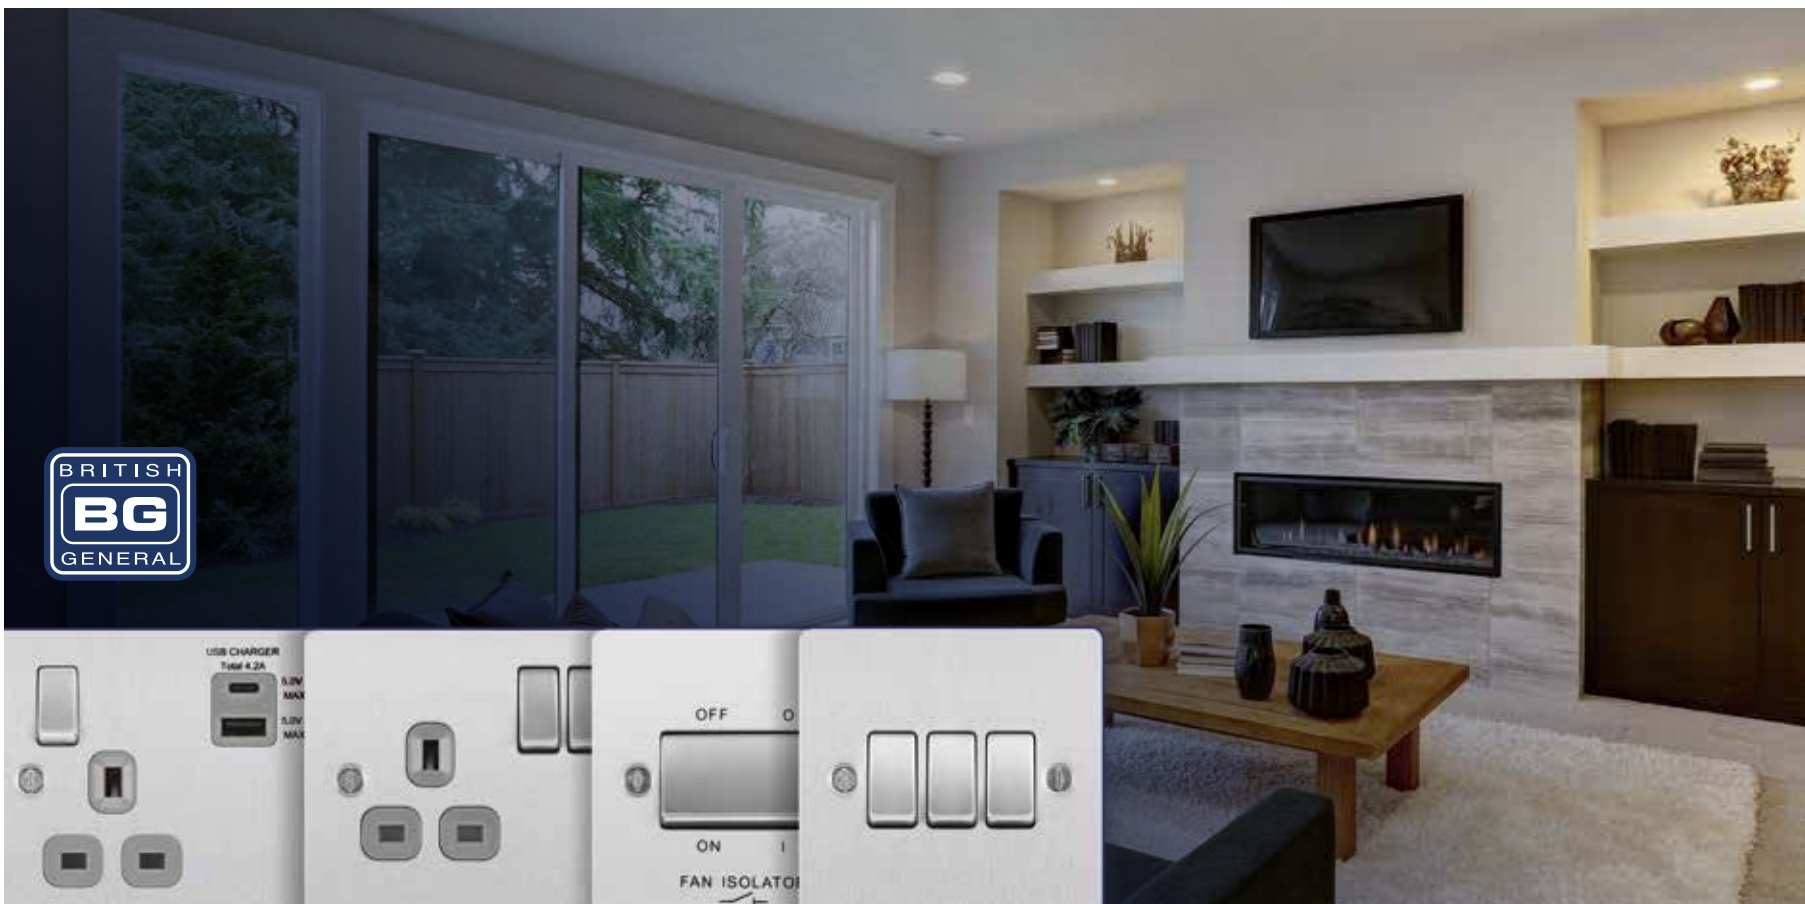

Flatplate Screwed Wiring Accessories

Our slimline screwed accessories are available in brushed steel stocked finish.

For specification projects, any finish can be created to suit the environment, for example matt black, pearl nickel, cream and antique brass. Products within the range include standard switches and sockets, USB sockets, shaver sockets, dimmer switches, double pole switches and telephone and data outlets.

Flatplate is available in Brushed Steel finish:



IN THE RANGE

| | |
|-----------------------------|----|
| Switches & Sockets | 86 |
| USB Sockets | 87 |
| Wi-Fi Extender Sockets | 87 |
| FCUs | 88 |
| Dimmer Switches | 88 |
| Co-axial / Sat / Tel / Data | 89 |
| Shaver Sockets | 89 |
| Blank Plates | 90 |
| Euro Module Plates | 90 |



BG Electrical products are guaranteed against faulty materials and workmanship for a period of 25 years from date of delivery.

Features & Benefits



Sleek flat profile



Angled in-line colour coded captive terminals

Twin Earth



No visible plastic around switches

Screwed flatplate sits flush against the wall

20 Amp 16AX Switches

- Captive terminal screws
- Terminal capacity 4 x 1.0mm², 4 x 1.5mm², 2 x 2.5mm² & 1 x 4.0mm²
- Manufactured to BS EN 60669-1
- Minimum mounting box depth 16mm



SBS43



APPROVED

| Brushed Steel | Description | Inner Carton | Outer Carton |
|---------------|---------------|--------------|--------------|
| SBS12 | Single, 2 way | 5 | 50 |
| SBS13 | Intermediate | 5 | 50 |
| SBS42 | Double, 2 way | 5 | 50 |
| SBS43 | Triple, 2 way | 5 | 50 |

10 Amp 3 Pole Fan Isolator

- 10 Amp, triple pole
- Captive terminal screws
- Terminal capacity 4 x 1.0mm², 4 x 1.5mm², 2 x 2.5mm² & 1 x 4.0mm²
- Manufactured to IEC 60669-2-4
- Minimum mounting box depth 16mm



SBS15



APPROVED

| Brushed Steel | Description | Inner Carton | Outer Carton |
|---------------|---------------------|--------------|--------------|
| SBS15 | 3 pole fan isolator | 5 | 50 |

13 Amp Socket Outlets

- Manufactured to BS 1363 part 2
- Twin earth fitted as standard to allow double earth facility for installations requiring high integrity protective connection Ref. BS 7671:2008
- Minimum mounting box depth 25mm
- Terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²



SBS22G



APPROVED

| Brushed Steel | Description | Inner Carton | Outer Carton |
|---------------|------------------|--------------|--------------|
| SBS21G | Single, switched | 5 | 50 |
| SBS22G | Double, switched | 5 | 50 |

20 Amp Double Pole Switches

- 20 Amp
- Terminal capacity 3 x 2.5mm² 2 x 4.0mm² 1 x 6.0mm²
- Colour coded terminals with backed out captive screws
- Manufactured to BS EN 60669-1
- Minimum mounting box depth 25mm



SBS31



APPROVED

| Brushed Steel | Description | Inner Carton | Outer Carton |
|---------------|---------------------------------------|--------------|--------------|
| SBS31 | 20 Amp DP switch with power indicator | 10 | 100 |

13 Amp Switched Socket with USB Charger – 2 x Outlets 2.1A

- 2 x Type A USB sockets – 2.1A total output, 5V
- Charges iPad, iPhone, tablets, mobiles, cameras and more
- Terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²
- Minimum mounting box depth 25mm – ideal for retrofit
- Twin earth fitted as standard to allow a double earth facility for installations requiring high integrity protective connection Ref. BS 7671:2008
- Manufactured to BS1363-2
- 10 year guarantee



APPROVED

SBS21U2G

| Brushed Steel | Description | Inner Carton | Outer Carton |
|---------------|--|--------------|--------------|
| SBS21U2G | Single socket + 2 x Type A USB (2.1A), grey insert | 5 | 50 |

13 Amp Switched Socket with USB Charger – 2 x Outlets 3.1A

- 2 x Type A USB sockets – 2.1A total output, 5V
- Charges iPad, iPhone, tablets, mobiles, cameras and more
- Terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²
- Minimum mounting box depth 25mm – ideal for retrofit
- Twin earth fitted as standard to allow a double earth facility for installations requiring high integrity protective connection Ref. BS 7671:2008
- Manufactured to BS1363-2



APPROVED

SBS22U3G

| Brushed Steel | Description | Inner Carton | Outer Carton |
|---------------|--|--------------|--------------|
| SBS22U3G | Double SP switched socket, outboard rockers + 2 x Type A USB (3.1A), grey insert | 5 | 50 |

13 Amp Switched Socket with USB A + C Charger 4.2A

- 1 x USB A and 1 x USB Type C - 4.2A total output, 5V
- Charges iPad, iPhone, tablets, mobiles, cameras and more
- Terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²
- Minimum mounting box depth 25mm – ideal for retrofit
- Twin earth fitted as standard to allow a double earth facility for installations requiring high integrity protective connection Ref. BS 7671:2008
- Manufactured to BS1363-2



APPROVED

SBS22UACG

| Brushed Steel | Description | Inner Carton | Outer Carton |
|---------------|--|--------------|--------------|
| SBS22UACG | Double SP, switched, outboard rockers and 1 x A + 1 x C type outlets | 5 | 50 |

13 Amp Wi-Fi Extender Switched Socket Outlet

- 2 x Type A USB sockets – 2.1A total output, 5V
- Charges iPad, iPhone, tablets, mobiles, cameras and more
- Terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²
- Minimum mounting box depth 25mm – ideal for retrofit
- Twin earth fitted as standard to allow a double earth facility for installations requiring high integrity protective connection Ref. BS 7671:2008
- Manufactured to BS1363-2



APPROVED

SBS22UWRG

| Brushed Steel | Description | Inner Carton | Outer Carton |
|---------------|---|--------------|--------------|
| SBS22UWRG | Double SP, switched, outboard rockers, Wi-Fi Extender | 5 | 50 |

13 Amp Fused Connection Units

- Manufactured to BS 1363 part 4
- Angled colour coded terminals with captive screws
- Minimum mounting box depth 35mm
- Terminal capacity 3 x 2.5mm², 2 x 4.0mm² & 1 x 6.0mm²



SBS52

| Brushed Steel | Description | Inner Carton | Outer Carton |
|---------------|---------------------------------|--------------|--------------|
| SBS52 | Switched with power indicator | 5 | 50 |
| SBS54 | Unswitched with power indicator | 5 | 50 |

45 Amp Double Pole Switches

- Manufactured to BS 4177 and BS EN 60669-1
- Cooker Control Units manufactured to BS4177, Double Pole Switches to BS EN 60669-1
- Minimum mounting box depth 47mm
- L & N terminal capacity 4 x 4.0mm², 3 x 6.0mm² & 1 x 16.0mm²



SBS70G

| Brushed Steel | Description | Inner Carton | Outer Carton |
|---------------|---|--------------|--------------|
| SBS70G | Switched with 13 Amp socket and power indicator | 5 | 50 |
| SBS72 | Switched with power indicator, double plate | 5 | 50 |
| SBS74 | Switched with power indicator, single plate | 10 | 100 |

Dimmer Switch – Intelligent Trailing Edge, Push Type

- Intelligent trailing edge dimmer suitable for LED, halogen, CFL and incandescent lamps
- Soft start, smooth dimming control and silent operation
- 2 Way push on/off with rotary control
- Overload protection
- Clearly marked terminals with backed out captive screws for easy installation
- Terminal capacity 3 x 1mm², 2 x 1.5mm² & 1 x 2.5mm²
- Manufactured to BS EN 60669-2-1
- Minimum mounting box depth 25mm
- 200-250V AC



SBS81

| Brushed Steel | Description | Inner Carton | Outer Carton |
|---------------|---|--------------|--------------|
| SBS81 | Single, 2 way, push on/off (20-200W/5-100W LED) | 5 | 50 |
| SBS82 | Double, 2 way, push on/off (20-200W/5-100W LED) | 5 | 50 |

Intelligent Dimmer Switch Product Specification

| | |
|--|---------------------|
| Voltage | 200-250AC 50/60Hz |
| Load Ratings (Max/Min per module) | |
| Tungsten/Incandescent | 20-200W |
| Eco-Halogen | 20-200W |
| Halogen Lamp (Mains Voltage) | 20-200W |
| Halogen Lamp (Low Voltage 12V) | 20-200W |
| Dimmable LED | 5-100W |
| Dimmable Compact Fluorescent (CFL) | 5-100W |
| Soft Start | 1.2 seconds to 100% |
| Type | Trailing Edge |

13 Amp Floor Socket Outlets

- With spring hinged cover
- Manufactured to BS 1363 part 2
- Twin earth fitted as standard to allow a double earth facility for installations requiring high integrity protective connection Ref. BS 7671:2008
- Minimum mounting box depth 25mm
- Terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²



SBS23G/FR



SBS24G/FR

| Product Code | Description | Inner Carton | Outer Carton |
|--------------|-------------|--------------|--------------|
| SBS23G/FR | Single | 10 | 100 |
| SBS24G/FR | Double | 5 | 50 |

Co-Axial Sockets

- Minimum mounting box depth 25mm
- Manufactured to BS 5733
- Used for TV or FM co-axial aerial connection
- Screw terminal



SBS60

| Brushed Steel | Description | Inner Carton | Outer Carton |
|---------------|-------------------------|--------------|--------------|
| SBS60 | Co-axial socket, single | 5 | 50 |

- See our Euro Module range for further Telecom, Data and Co-axial Options



APPROVED

Telephone Outlets

- Minimum mounting box depth 35mm
- Manufactured to BS 6312



SBSBTM1

| Brushed Steel | Description | Inner Carton | Outer Carton |
|---------------|-----------------------------|--------------|--------------|
| SBSBTM1 | Telephone master, single | 5 | 50 |
| SBSBTS1 | Telephone secondary, single | 5 | 50 |

- See our Euro Module range for further Telecom, Data and Co-axial Options



APPROVED

Shaver Socket

- Manufactured to BS EN 61558-1 and BS EN 61558-2-5
- Terminal capacity 3 x 2.5mm² & 2 x 4.0mm²
- Minimum mounting box depth 47mm



SBS20G

| Brushed Steel | Description | Inner Carton | Outer Carton |
|---------------|-------------------------------------|--------------|--------------|
| SBS20G | Shaver socket 115/240V dual voltage | 5 | 30 |

Blank Plates

- Manufactured to BS 5733
- Fitted with Earth terminal
- Ideal for safely covering unused electrical connections



SBS94

SBS95

| Brushed Steel | Description | Inner Carton | Outer Carton |
|---------------|-------------|--------------|--------------|
| SBS94 | Single | 5 | 50 |
| SBS95 | Double | 5 | 50 |



Euro Module Front Plates

- Manufactured to BS 5733
- Fitted with Earth terminal



SBSEMS1


SBSEMS2

| Brushed Steel | Description | Inner Carton | Outer Carton |
|---------------|----------------------------------|--------------|--------------|
| SBSEMS1 | Single Euro Module, single plate | 10 | 100 |
| SBSEMS2 | Twin Euro Module, single plate | 10 | 100 |
| SBSEMR4 | Quad Euro Module, double plate | 5 | 50 |



Spring Hinged Cover Euro Module Front Plates

- Ideal for floor sockets – an easy and convenient way to access mains electricity in busy locations where wall space is restricted
- Slimline screwed flatplate with ultra flat clip on/off front plate
- Sprung hinges for durability
- Fitted with earth terminal
- Anti-fingerprint lacquer

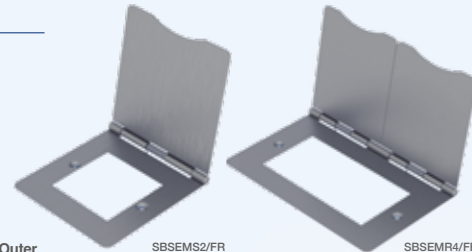

SBSEMS2/FR

SBSEMR4/FR

| Brushed Steel | Description | Inner Carton | Outer Carton |
|---------------|----------------------|--------------|--------------|
| SBSEMS2/FR | 2 module – square | 10 | 100 |
| SBSEMR4/FR | 4 module – rectangle | 10 | 100 |

13 Amp Double Pole Key Controlled Socket Outlet

- Manufactured to BS 1363-2, BS EN 60669-1
- Mounting box depth 47mm
- Terminal capacity: 3 x 2.5mm², 2 x 4.0mm², 1 x 6.0mm²
- Lockable socket, supplied with two keys
- Double pole switch
- Supplied as kit of Euro Module components



SBSKYSWSG*

| Brushed Steel | Description | Inner Carton |
|---------------|--|--------------|
| SBSKYSWSG* | 13 Amp switched socket, key controlled | EM |

Euro Module Range Extension

Quick & Easy Installation

A flexible solution of power, data, telephone, television and audio combinations to suit the wide ranging needs of the customer.

- Select the desired combination of front plate and module(s)
- Simple installation, wire the module through the front plate aperture then push the module into place
- Modules of mains and extra low voltage rating must not be fitted to the same front plate aperture Ref. BS 7671:2008

See page 54 & 55

Front Plate



SBSEMS2

Module



EMTVFMSATB



**UK:****HEAD OFFICE:**

Email: info@bgelectrical.uk

Luceco plc, Caparo House
103 Baker Street, London
England, W1U 6LN

DISTRIBUTION CENTRE:

Tel: +44 (0) 1952 238 100

Email: uk_sales@bgelectrical.uk

Luceco plc
Luceco Distribution Centre
Stafford Park 1, Telford
Shropshire, England, TF3 3BD

FRANCE:

Email: fr_sales@luceco.com

ITALY:

Email: it_sales@luceco.com

SPAIN:

Tel: +34 93 829 55 75

Email: es_sales@luceco.com

Nexus Industries LTD
C/ Bobinadora 1-5
08302 Mataró
Barcelona (SPAIN)

MIDDLE EAST & AFRICA:

Tel: +971 4 609 1867

Email: mea_sales@luceco.com

Luceco Middle East FZCO
Bldg. 5EB, Office 342
PO Box 371128, DAFZA
Dubai, UAE

ASIA PACIFIC:**JIAXING:**

Tel: +86 (0) 573 8357 0200

Email: asia_sales@luceco.com

No 1438, Jiachuang Road
Xiuzhou Industrial Park, Jiaxing
Zhejiang, China, P.C. 314031

HONG KONG:

Email: hk_sales@luceco.com

UNITED STATES:

Email: us_sales@luceco.com

MEXICO & LATIN AMERICA:

Tel: +52 (81) 5000 9437

Email: ventas@luceco.com

Luceco México
AV Lázaro Cárdenas #318 int 201
Col Real San Agustín
San Pedro Garza García
N.L. Mexico CP 66278

TECHNICAL SUPPORT:

Tel: 03300 249 279

Email: technical.support@bg-electrical.co.uk

Lines open Monday to Friday
8.30am to 5pm, with answer phone
service outside these hours.

