FLAT PLATE

LOW PROFILE SCREWED FINISHES



www.bgelectrical.uk



Flatplate Screwed
Wiring Accessories

Our slimline screwed accessories are available in brushed steel stocked finish.

For specification projects, any finish can be created to suit the environment, for example matt black, pearl nickel, cream and antique brass. Products within the range include standard switches and sockets, USB sockets, shaver sockets, dimmer switches, double pole switches and telephone and data outlets.

Flatplate is available in Brushed Steel finish:




IN THE RANGE

Switches & Sockets	4
USB Sockets	5
Wi-Fi Extender Sockets	5
FCUs	6
Dimmer Switches	6
Co-axial / Sat / Tel / Data	7
Shaver Sockets	7
Blank Plates	8
Euro Module Plates	8



BG Electrical products are guaranteed against faulty materials and workmanship for a period of 25 years from date of delivery.

Features & Benefits

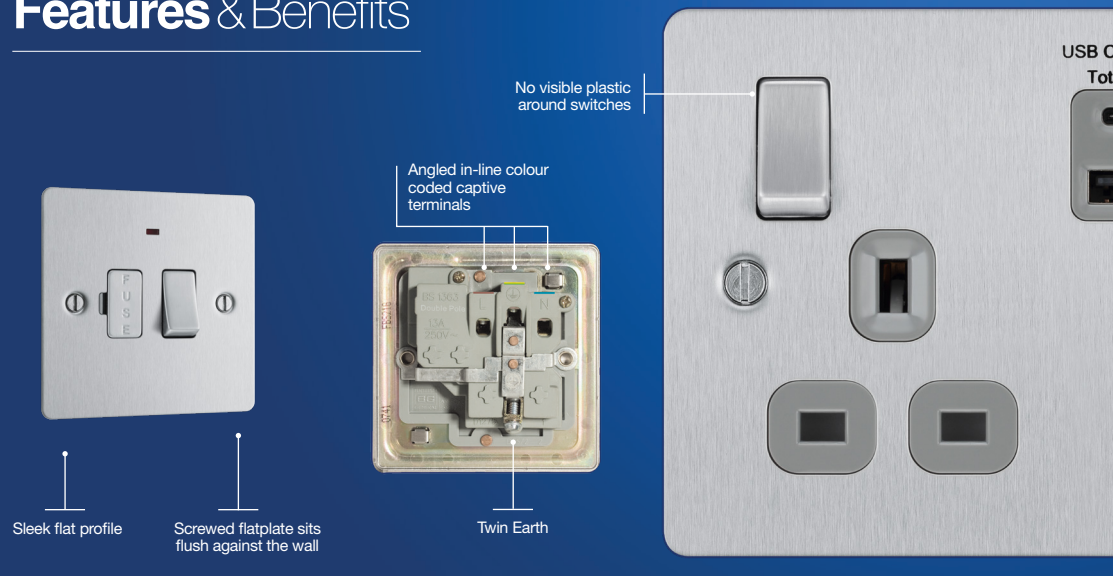


Email: sales@bgelectrical.co.uk

Flatplate Screwed | Wiring Accessories

20 Amp 16AX Switches

- Captive terminal screws
- Terminal capacity 4 x 1.0mm², 4 x 1.5mm², 2 x 2.5mm² & 1 x 4.0mm²
- Manufactured to BS EN 60669-1
- Minimum mounting box depth 16mm

Brushed Steel	Description	Inner Carton	Outer Carton
SBS12	Single, 2 way	5	50
SBS13	Intermediate	5	50
SBS42	Double, 2 way	5	50
SBS43	Triple, 2 way	5	50




SBS43

APPROVED

10 Amp 3 Pole Fan Isolator

- 10 Amp, triple pole
- Captive terminal screws
- Terminal capacity 4 x 1.0mm², 4 x 1.5mm², 2 x 2.5mm² & 1 x 4.0mm²
- Manufactured to IEC 60669-2-4
- Minimum mounting box depth 16mm

Brushed Steel	Description	Inner Carton	Outer Carton
SBS15	3 pole fan isolator	5	50




SBS15

APPROVED

13 Amp Socket Outlets

- Manufactured to BS 1363 part 2
- Twin earth fitted as standard to allow double earth facility for installations requiring high integrity protective connection Ref. BS 7671:2008
- Minimum mounting box depth 25mm
- Terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²

Brushed Steel	Description	Inner Carton	Outer Carton
SBS21G	Single, switched	5	50
SBS22G	Double, switched	5	50

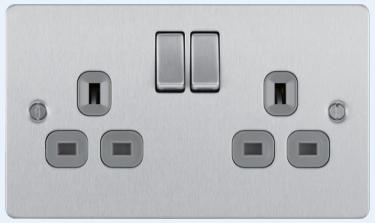

SBS22G

APPROVED

20 Amp Double Pole Switches

- 20 Amp
- Terminal capacity 3 x 2.5mm² 2 x 4.0mm² 1 x 6.0mm²
- Colour coded terminals with backed out captive screws
- Manufactured to BS EN 60669-1
- Minimum mounting box depth 25mm

Brushed Steel	Description	Inner Carton	Outer Carton
SBS31	20 Amp DP switch with power indicator	10	100




SBS31

APPROVED

13 Amp Switched Socket with USB Charger – 2 x Outlets 2.1A

- 2 x Type A USB sockets – 2.1A total output, 5V
- Charges iPad, iPhone, tablets, mobiles, cameras and more
- Terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²
- Minimum mounting box depth 25mm – ideal for retrofit
- Twin earth fitted as standard to allow a double earth facility for installations requiring high integrity protective connection Ref. BS 7671:2008
- Manufactured to BS1363-2
- 10 year guarantee

Brushed Steel	Description	Inner Carton	Outer Carton
SBS21U2G	SIngle socket + 2 x Type A USB (2.1A), grey insert	5	50



APPROVED

SBS22G

13 Amp Switched Socket with USB Charger – 2 x Outlets 3.1A

- 2 x Type A USB sockets – 2.1A total output, 5V
- Charges iPad, iPhone, tablets, mobiles, cameras and more
- Terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²
- Minimum mounting box depth 25mm – ideal for retrofit
- Twin earth fitted as standard to allow a double earth facility for installations requiring high integrity protective connection Ref. BS 7671:2008
- Manufactured to BS1363-2

Brushed Steel	Description	Inner Carton	Outer Carton
SBS22U3G	Double SP switched socket, outboard rockers + 2 x Type A USB (3.1A), grey insert	5	50




APPROVED

SBS22U3G

13 Amp Switched Socket with USB A + C Charger 4.2A

- 1 x USB A and 1 x USB Type C - 4.2A total output, 5V
- Charges iPad, iPhone, tablets, mobiles, cameras and more
- Terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²
- Minimum mounting box depth 25mm – ideal for retrofit
- Twin earth fitted as standard to allow a double earth facility for installations requiring high integrity protective connection Ref. BS 7671:2008
- Manufactured to BS1363-2

Brushed Steel	Description	Inner Carton	Outer Carton
SBS22UACG	Double SP, switched, outboard rockers and 1 x A + 1 x C type outlets	5	50



APPROVED

SBS22UACG

13 Amp Wi-Fi Extender Switched Socket Outlet

- 2 x Type A USB sockets – 2.1A total output, 5V
- Charges iPad, iPhone, tablets, mobiles, cameras and more
- Terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²
- Minimum mounting box depth 25mm – ideal for retrofit
- Twin earth fitted as standard to allow a double earth facility for installations requiring high integrity protective connection Ref. BS 7671:2008
- Manufactured to BS1363-2

Brushed Steel	Description	Inner Carton	Outer Carton
SBS22UWRG	Double SP, switched, outboard rockers, Wi-Fi Extender	5	50



APPROVED

SBS22UWRG

13 Amp Fused Connection Units

- Manufactured to BS 1363 part 4
- Angled colour coded terminals with captive screws
- Minimum mounting box depth 35mm
- Terminal capacity 3 x 2.5mm², 2 x 4.0mm² & 1 x 6.0mm²

APPROVED



SBS52

Brushed Steel	Description	Inner Carton	Outer Carton
SBS52	Switched with power indicator	5	50
SBS54	Unswitched with power indicator	5	50

45 Amp Double Pole Switches

- Manufactured to BS 4177 and BS EN 60669-1
- Cooker Control Units manufactured to BS4177, Double Pole Switches to BS EN 60669-1
- Minimum mounting box depth 47mm
- L & N terminal capacity 4 x 4.0mm², 3 x 6.0mm² & 1 x 16.0mm

APPROVED



SBS70G

Brushed Steel	Description	Inner Carton	Outer Carton
SBS70G	Switched with 13 Amp socket and power indicator	5	50
SBS72	Switched with power indicator, double plate	5	50
SBS74	Switched with power indicator, single plate	10	100

Dimmer Switch – Intelligent Trailing Edge, Push Type

- Intelligent trailing edge dimmer suitable for LED, halogen, CFL and incandescent lamps
- Soft start, smooth dimming control and silent operation
- 2 Way push on/off with rotary control
- Overload protection
- Clearly marked terminals with backed out captive screws for easy installation
- Terminal capacity 3 x 1mm², 2 x 1.5mm² & 1 x 2.5mm²
- Manufactured to BS EN 60669-2-1
- Minimum mounting box depth 25mm
- 200-250V AC

APPROVED



SBS81

Brushed Steel	Description	Inner Carton	Outer Carton
SBS81	Single, 2 way, push on/off (20-200W/5-100W LED)	5	50
SBS82	Double, 2 way, push on/off (20-200W/5-100W LED)	5	50



Intelligent Dimmer Switch
Product Specification


Voltage	200-250AC 50/60Hz
Load Ratings (Max/Min per module)	
Tungsten/Incandescent	20-200W
Eco-Halogen	20-200W
Halogen Lamp (Mains Voltage)	20-200W
Halogen Lamp (Low Voltage 12V)	20-200W
Dimmable LED	5-100W
Dimmable Compact Fluorescent (CFL)	5-100W
Soft Start	1.2 seconds to 100%
Type	Trailing Edge

13 Amp Floor Socket Outlets

- With spring hinged cover
- Manufactured to BS 1363 part 2
- Twin earth fitted as standard to allow a double earth facility for installations requiring high integrity protective connection Ref. BS 7671:2008
- Minimum mounting box depth 25mm
- Terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²



SBS23G/FR



SBS24G/FR

Product Code	Description	Inner Carton	Outer Carton
SBS23G/FR	Single	10	100
SBS24G/FR	Double	5	50

Co-Axial Sockets

- Minimum mounting box depth 25mm
- Manufactured to BS 5733
- Used for TV or FM co-axial aerial connection
- Screw terminal



SBS60

Brushed Steel	Description	Inner Carton	Outer Carton
SBS60	Co-axial socket, single	5	50

- See our Euro Module range for further Telecom, Data and Co-axial Options

APPROVED

Telephone Outlets

- Minimum mounting box depth 35mm
- Manufactured to BS 6312



SBSBTM1

Brushed Steel	Description	Inner Carton	Outer Carton
SBSBTM1	Telephone master, single	5	50
SBSBTS1	Telephone secondary, single	5	50

- See our Euro Module range for further Telecom, Data and Co-axial Options

APPROVED

Shaver Socket

- Manufactured to BS EN 61558-1 and BS EN 61558-2-5
- Terminal capacity 3 x 2.5mm² & 2 x 4.0mm²
- Minimum mounting box depth 47mm

APPROVED




SBS20G


Brushed Steel	Description	Inner Carton	Outer Carton
SBS20G	Shaver socket 115/240V dual voltage	5	30

Blank Plates

- Manufactured to BS 5733
- Fitted with Earth terminal
- Ideal for safely covering unused electrical connections



SBS94

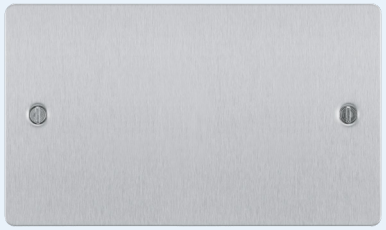

SBS95

Brushed Steel	Description	Inner Carton	Outer Carton
SBS94	Single	5	50
SBS95	Double	5	50


APPROVED

Euro Module Front Plates

- Manufactured to BS 5733
- Fitted with Earth terminal



SBSEMS1




SBSEMS2

Brushed Steel	Description	Inner Carton	Outer Carton
SBSEMS1	Single Euro Module, single plate	10	100
SBSEMS2	Twin Euro Module, single plate	10	100
SBSEMR4	Quad Euro Module, double plate	5	50


APPROVED

Spring Hinged Cover Euro Module Front Plates

- Ideal for floor sockets – an easy and convenient way to access mains electricity in busy locations where wall space is restricted
- Slimline screwed flatplate with ultra flat clip on/off front plate
- Sprung hinges for durability
- Fitted with earth terminal
- Anti-fingerprint lacquer



SBSEMS2/FR




SBSEMR4/FR

Brushed Steel	Description	Inner Carton	Outer Carton
SBSEMS2/FR	2 module – square	10	100
SBSEMR4/FR	4 module – rectangle	10	100

13 Amp Double Pole Key Controlled Socket Outlet

- Manufactured to BS 1363-2, BS EN 60669-1
- Mounting box depth 47mm
- Terminal capacity: 3 x 2.5mm², 2 x 4.0mm², 1 x 6.0mm²
- Lockable socket, supplied with two keys
- Double pole switch

***Supplied as kit of Euro Module components**

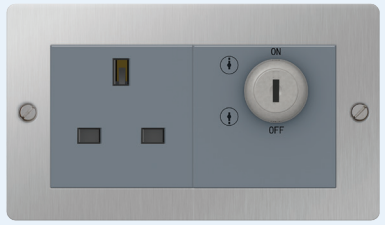

SBSKYSWSG*

Brushed Steel	Description	Inner Carton
SBSKYSWSG*	13 Amp switched socket, key controlled	EM

Euro Module Range Extension

Quick & Easy Installation

A flexible solution of power, data, telephone, television and audio combinations to suit the wide ranging needs of the customer.

- Select the desired combination of front plate and module(s)
- Simple installation, wire the module through the front plate aperture then push the module into place
- Modules of mains and extra low voltage rating must not be fitted to the same front plate aperture Ref. BS 7671:2008

Front Plate



SBSEMS2

Module



EMTVFMSATB





UK:

HEAD OFFICE:

Email: info@bgelectrical.uk

Luceco plc, Caparo House
103 Baker Street, London
England, W1U 6LN

DISTRIBUTION CENTRE:

Tel: +44 (0) 1952 238 100
Email: uk_sales@bgelectrical.uk

Luceco plc
Luceco Distribution Centre
Stafford Park 1, Telford
Shropshire, England, TF3 3BD

FRANCE:

Email: fr_sales@luceco.com

ITALY:

Email: it_sales@luceco.com

SPAIN:

Tel: +34 93 829 55 75
Email: es_sales@luceco.com

Nexus Industries LTD
C/ Bobinadora 1-5
08302 Mataró
Barcelona (SPAIN)

MIDDLE EAST & AFRICA:

Tel: +971 4 609 1867
Email: mea_sales@luceco.com

Luceco Middle East FZCO
Bldg. 5EB, Office 342
PO Box 371128, DAFZA
Dubai, UAE

ASIA PACIFIC:

JIAXING:

Tel: +86 (0) 573 8357 0200
Email: asia_sales@luceco.com

No 1438, Jiachuang Road
Xiuzhou Industrial Park, Jiaxing
Zhejiang, China, P.C. 314031

HONG KONG:

Email: hk_sales@luceco.com

UNITED STATES:

Email: us_sales@luceco.com

MEXICO & LATIN AMERICA:

Tel: +52 (81) 5000 9437
Email: ventas@luceco.com

Luceco México
AV Lāzano Cārdenas #318 int 201
Col Real San Agustin
San Pedro Garza Garcia
N.L. Mexico CP 66278

TECHNICAL SUPPORT:

Tel: 01952 238 128
Email: technical.support@bgelectrical.co.uk

Lines open Monday to Friday
8.30am to 5pm, with answer phone
service outside these hours.

LUCECO GROUP