



Ceiling & Lighting

ACCESSORIES



www.bgelectrical.uk



Ceiling & Lighting Accessories

High quality and robust accessories offering durability, reliability and ease of installation.

Our products combine modern styling with ease of use for installers, and are manufactured to high quality and reliability standards. The extensive range includes; ceiling roses, pendant sets, batten holders and fluorescent starters and all the technical information.

IN THE RANGE

Ceiling Roses	140
Pendant Sets	140
Batten Holders	140
Ceiling Switches	141
Lamp Holders	141
Luminaire Connectors	142
Fluorescent Starters	142



BG Electrical products are guaranteed against faulty materials and workmanship for a period of 25 years from date of delivery.

Features & Finishes



Ceiling
Switches



Fluorescent
Starters




Lamp Holders
& Pendants

Ceiling Roses

- Large capacity earth terminal with locking terminal screw
- Eight "in-line" terminals all with captive screws
- Wiring aperture in base with extra knockout for ease of wiring
- Spin-on cover with smooth cable entry for maximum protection of pendant conductor insulation
- Large capacity earth terminal with locking terminal screw
- Base moulded in clear polycarbonate
- Cover moulded in satin finish urea
- Manufactured to BS67

Product Code	Description	Inner Carton	Outer Carton
561	3.5" diameter	10	100
661	3" diameter	10	100



Pendant Sets (T2)

- Large capacity earth terminal with locking terminal screw
- Wiring aperture in base with extra knockout for ease of wiring
- 0.75mm pendant flex heat resistant to BS6141
- Spin-on cover with smooth cable entry for maximum protection of pendant conductor insulation
- Eight "in-line" terminals all with captive screws
- Manufactured to BS67 and BS EN 60598-2-1


Product Code	Description	Inner Carton	Outer Carton
566	6" flex and 3.5" base	10	100
569	9" flex and 3.5" base	10	100
666	6" flex and 3" base	10	100
666DC	6" pendant set with decorators cover	10	100
669	9" flex and 3" base	10	100
6612	12" flex and 3" base	10	100



Batten Holders Enclosed (T2)

- Large capacity earth terminal with locking terminal screw
- Diameter of batten lampholder is 80mm (3")
- T2 temperature rated
- Wiring aperture in base with extra knockout for ease of wiring
- Wired with heat resistant wire
- Base cover can be removed without removing HO skirt
- Manufactured to BS EN 61184

Product Code	Description	Inner Carton	Outer Carton
763	2 terminal body, 3 terminals + earth in base, PVC tails, HO skirt	10	100
767	2 terminal body angled, 3 terminals + earth in base and PVC tails, HO skirt	10	100

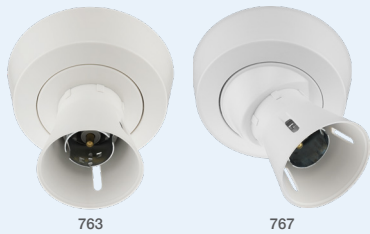

Batten Holders (T2)

- Manufactured to BS EN 61184
- Knock-outs to allow for surface wiring
- 3 Terminals
- For B22 bayonet cap lamps


Product Code	Description	Inner Carton	Outer Carton
752	3 terminals with short skirt	10	100
753	3 terminals with HO skirt	10	100
747	3 terminal angled with HO skirt	10	100
748	3 terminal angled with short skirt	10	100



Ceiling Switches

- Supplied with approximately 1.5 metres of cord
- Individually bagged
- Manufactured to BS EN 60669-01

Product Code	Description	Inner Carton	Outer Carton
801	6 Amp 1 way	10	100
802	6 Amp 2 way	10	100
803	45 Amp double pole with power indicator	10	100
804	10 Amp triple pole fan isolator	10	100
801PC	Replacement pull cord, 1.5m	20	200

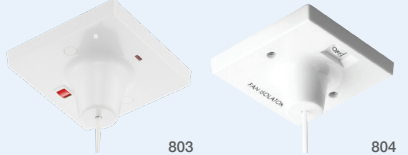

Decorative Ceiling Roses and Switches

- Supplied with approximately 1.5 metres of cord
- Individually bagged
- Manufactured to BS EN 60669-01


Product Code	Description	Inner Carton	Outer Carton
802CH	6 Amp 2 way ceiling switch chrome finish	5	50
802ST	6 Amp 2 way ceiling switch steel finish	5	50
661CH	Chrome finish cover with polycarbonate 3" diameter base	5	50
661ST	Steel finish cover with polycarbonate 3" diameter base	5	50



Lamp Holders – Heat Resistant (T2)

- Moulded in robust fully insulating plastic
- Positive cord-grip
- Manufactured to BS EN 61184
- 2A at 250V AC

Product Code	Description	Inner Carton	Outer Carton
720	Cord grip with short skirt	20	20
721	Cord grip with HO skirt	20	20
725	1/2"/12.6mm 26 BSB threaded entry with short skirt	20	20
252	Pushbar lamp holder switched 1/2" 26 BSB with threaded entry and short skirt	20	20
7369	HO skirt	100	1000



Pendant Set – Edison Screw

- Large capacity earth terminal with locking terminal screw
- Wiring aperture in the base with extra knockout for ease of wiring
- Base incorporates L, N and loop-in terminals with 8 individual cable entries and captive screws
- Spin-on-cover with smooth cable entry for maximum protection of pendant conductor insulation
- Alternative fixing holes allow for off centre mounting
- 0.75mm² two core circular cable
- Lamp holder pre-wired to cable ready to be fitted to ceiling rose
- 6"/15cm flex & 3"/80mm diameter base

Product Code	Description	Inner Carton	Outer Carton
666ES14	Pendant set – E14 Edison screw	10	100
666ES27	Pendant set – E27 Edison screw	10	100



Luminaire Support Connector

- The 6A plug-in ceiling rose offers a pluggable connection for luminaires
- The luminaire can be connected and disconnected under load
- Plug and sockets have 4 terminations for live, neutral, earth and loop-in
- Supports up to 5kg load
- Moulded in durable PC matt plastic material
- Cables have prepared ends



Product Code	Description	Inner Carton	Outer Carton
LSC4PA/4C2	Luminaire support connector 4 pin plug + socket 2M 4C 0.75mm cable	10	100
LSC4PA/4C3	Luminaire support connector 4 pin plug + socket 3M 4C 0.75mm cable	10	100
LSC4PA	Luminaire support connector 4 pin plug + socket assembly	10	100
LSCPLG/RD	Luminaire support connector 4 pin plug – red	10	100
LSCPLG	Luminaire support connector 4 pin plug	10	100

Fluorescent Starters

- Manufactured to BS EN 60155
- All starters are kite marked



Product Code	Description	Inner Carton	Outer Carton
FSU	4-80 Watt	10	100
FS2	4-22 Watt single series	10	100
FS125	70, 75, 80, 85, 100-125 Watt	10	100

Fluorescent Starter Specifications

Lamp Type	Wattage	Circuit	FSU	FS125	FS2
150mm	4 W	Single	220/250V	-	110/130V
-	-	Twin Series	-	-	220/250V
225mm	6W	Single	220/250V	-	110/130V
-	-	Twin Series	-	-	220/250V
300mm	8W	Single	220/250V	-	110/130V
-	-	Twin Series	-	-	220/250V
525mm	13W	Single	220/250V	-	-
450mm	15W	Single	220/250V	-	110/130V
-	-	Twin Series	-	-	220/250V
360mm	16W	Single	220/250V	-	110/130V
600mm	18/20W	Single	220/250V	-	110/130V
-	-	Twin Series	-	-	220/250V
Circline	22W	Single	220/250V	-	110/130V
900mm	30W	Single	220/250V	-	-
Circline	32W	Single	220/250V	-	-
600mm	40W	Single	220/250V	-	-
1200mm	36/40W	Single	220/250V	-	-
1500mm	85/80W	Single	220/250V	240/250V	-
1800mm	70/85W	Single	220/250V	240/250V	-
2400mm	100/125W	Single	-	240/250V	-



BRITISH
BG
GENERAL

Storm

— WEATHERPROOF WIRING ACCESSORIES —

BG Weatherproof Range
The preferred choice of the nation's contractors for over 10 years



An evolution in weatherproof switches & sockets

The best just got better...

Now even easier to install and operate

- Fast-fix – no separate screws, no screw covers, 150° rotation
- Quick release socket plate with 1/4 turn fixing **for easier installation**
- Patented cable entry prevents accidental opening of the cover
- Redesigned paddles with smoother operation, **for easier use**
- Additional sealant channels to prevent water ingress
- Improved internal seals over fixing points



www.bg-storm.uk



UK:

HEAD OFFICE:

Email: info@jacobus.com

Luxon plc, Capenhurst House
100 Broad Street, London
England, W1J 7UL

DISTRIBUTION CENTRE:

Tel: +44 (0)1902 230 100

Email: uk_sales@jacobus.com

Luxon plc
Luxon Distribution Centre
Buckford Park 1, Telford
Shropshire, England, TF3 3ED

FRANCE:

Email: f_sales@jacobus.com

ITALY:

Email: i_sales@jacobus.com

SPAIN:

Tel: +34 90329 66 76

Email: es_sales@jacobus.com

News Industries LTD

C/O Britannia 1st

33000 Madrid

Barcelona (Spain)

MIDDLE EAST & AFRICA:

Tel: +971 4 559 1987

Email: mea_sales@jacobus.com

Luxon Middle East FZCO
Bldg 418, Office 340
PO Box 271126, DAFRA
Dubai, UAE

ASIA PACIFIC:

JAPANESE:

Tel: +81 (0) 3 572 0287 0288

Email: asia_sales@jacobus.com

No. 108, Boshueng Road
Qixiao Industrial Park, Jiangsu
Zhangji, China, P.O. 214021

HONGKONG:

Email: hk_sales@jacobus.com

UNITED STATES:

Email: us_sales@jacobus.com

MEXICO & LATIN AMERICA:

Tel: +52 (0) 555 9888 1401

Email: latam@jacobus.com

United States:

4810 West Chapman Street, 201

City Place, San Antonio

San Pedro de San Antonio

P.O., Mexico C.P. 78278

TECHNICAL SUPPORT:

Tel: +44 (0) 1902 230 108

Email: technical.support@jacobus.com

Lines open Monday to Friday

8.30am to 5pm, with emergency phone
service outside these hours.

